
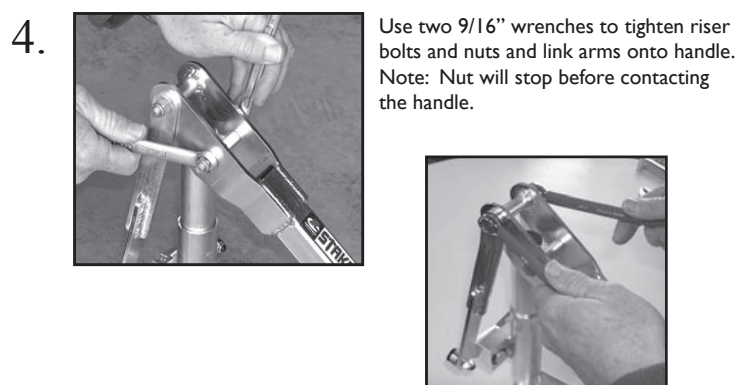
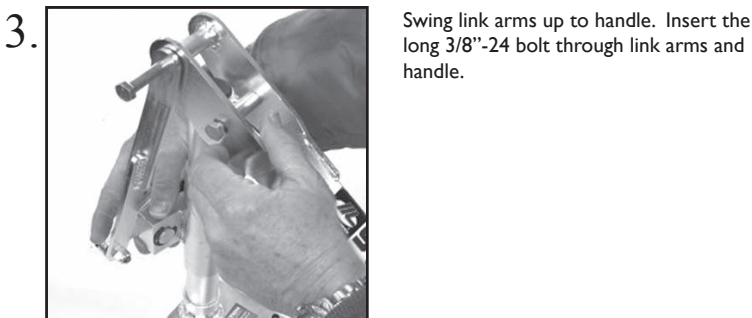
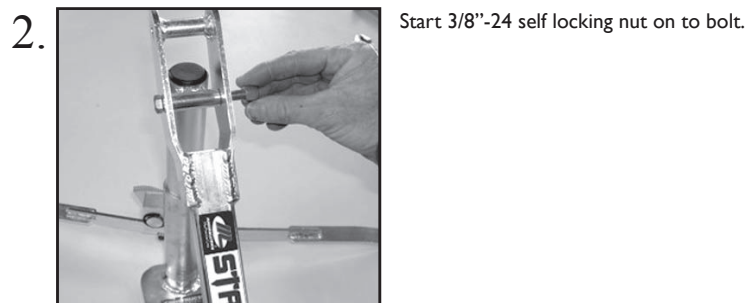


Assembly Instructions

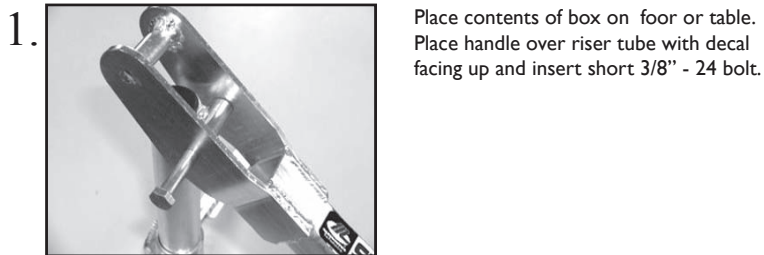

Operating Instructions

1. Remove screws or nails from stake and form.
2. Lift handle to up position so that jaws are fully open.
3. Place unit so that jaws are on either side of the stake. Figure 1 below.
4. Push down on handle, clamping on stake and lifting it out of the ground. Figure 2 below.
5. Repeat motion as necessary until stake is free.

Tip: In soft conditions or mud, place a short piece (1 to 2 feet in length) of 2 x 4 lumber under the base of the unit. This will spread the force over a larger area, allowing stake removal even in muddy conditions.



Caution: Never put your fingers or hands between the jaws, or between the jaws and the stake.

Replacement jaws - 4 jaws & hardware - Part # CA0002

Celina Tent Inc. / Celina Enterprises
 Toll-Free: 866-438-8368 / 419-586-3610
 5373 State Route 29, Celina, Ohio 45822
www.GetTent.com

A Division of  CELINA TENT

